

No one does it
like you

Canon

PERFORMANCE, POWER, AND PACKED WITH NEW FEATURES

imageRUNNER ADVANCE 6500i III Series



The imageRUNNER ADVANCE 6500i III Series delivers fast, high quality black and white printing that you can count on every time. Powerful, versatile and featuring new enhancements that deliver improved user customisation, better security, maximised uptime, and the ability to rein in your printing costs, you'll love your new 6500i III Series device.



SECURITY

- Standard HDD Data Encryption
- HDD Data Erase
- Forced reservation printing
- International standard for MFD security
- Technology to verify that the device boot process, firmware, and applications initialize without alterations or tampering



INTEGRATION

- Collaborates with key Canon software solutions
- Scanning to OfficeOpen XML
- New Standard Universal Login Manager with Access Management System integration
- Supports integration with popular cloud services like Google Drive and Box*



PERFORMANCE

- New user interface
- Simple consumable replacement with video guide
- Motion sensor/sleep recovery triggers
- Enhanced scan/fax capabilities



SUSTAINABILITY

- Remote shutdown/weekly timer
- More energy efficiency
- Reduced CO² emissions
- 100% recycled plastics
- ENERGY STAR rating




COST CONTROL

- Standard Universal Login Manager
- Forced reservation printing
- Skips blank pages from printing



AT A GLANCE

- Motion sensor technology with three sensitivity settings
- New user interface with smartphone technology
- Up to 75 prints per minute

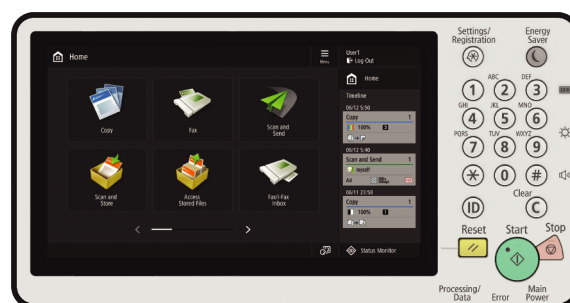

* Requires uniFLOW Online Express or uniFLOW Online subscription

imageRUNNER ADVANCE 6555i III / 6565i III / 6575i III SPECIFICATIONS



Basic Specifications

Operation Panel	10.1" fully-full control panel touch screen (smartphone technology)
Memory	3GB
Hard Disk Drive	Standard 250GB, Maximum: 1TB
Network Interface Connection	NETWORK Standard: 10Base-T/100Base-TX/1000Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC
Other Interface (Standard)	USB3.0 x 1 (Host), USB 2.0 x 2 (Host), USB2.0 x 1 (Device)
Copy/Print Speed	6555i III: Up to 55ppm 6565i III: Up to 65ppm 6575i III: Up to 75ppm
First-Copy-Out Time	iR-ADV 6555i III: Approx. 3.3 seconds or less iR-ADV 6565i III: Approx. 3.3 seconds or less iR-ADV 6575i III: Approx. 3.1 seconds or less
Paper Sources (80gsm)	Standard: 4,200 sheets (Paper Drawer: 1,500 sheets x 2 + Paper Cassettes: 550 sheets x 2 + Multi-purpose Tray: 100 sheets Optional: 3,500 sheets (POD Deck Lite - C1 or Paper Deck-E1) Maximum: 7,700 sheets
Finishing Capabilities	Optional Copy Tray: None Optional Shift Tray: Group, Collate, Offset Optional Staple Finisher: Group, Collate, Offset, Staple, Hole Punch, ECO Stapling & Staple on Demand Optional Booklet Finisher: Group, Collate, Offset, Staple, Booklet, Hole Punch, ECO Stapling & Staple on Demand
Duplexing	Standard Single Pass Duplexing
Warm-up Time	From Power On: 30 Sec or Less From Sleep Mode: 30 Sec or Less
Power Requirements	220-240V, 50-60Hz, 10A
Power Consumption	2.4kW or less Sleep Mode: 0.9W or less
Dimensions (H x W x D)	(1,220mm x 670mm x 779mm)
Installation Space (W x D)	1,533mm x 1,353mm
Weight	Approximately 234kg
Toner (Estimated Yield at 5% Coverage)	TG54: 56,000 (Black)

Print Specifications

Printing Resolution	600 x 600 dpi, Up to 1200 x 1200 dpi (Maximum)
PDL Support	Standard: UFR II, PCL Optional: Adobe PostScript
Acceptable Paper Type	Cassettes: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper, Tab paper ¹ Paper Drawers: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Letterhead, Bond paper Bypass: Thin paper, Plain paper, Recycled paper, Colour paper, Heavy paper, Pre-punched paper, Bond, Transparency, Labels, Letterhead, Tab paper, Tracing ²
Acceptable Paper Sizes	Cassettes: A3, A4, A4R, A5R, and Custom Size (139.7mm x 182mm to 297mm x 487.7mm) Paper Drawers: A4 Bypass: A3, A4, A4R, A5R, and Custom Size/Free Size (100mm x 148mm to 297mm x 487.7mm)
Acceptable Paper Weights	Cassette: 52 to 220gsm Bypass: 52 to 256gsm
Print Driver Supported OS	UFR II, PostScript 3: Server 2003/Server 2003/R2 Vista Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10, MacOSX (10.5.8 or later) PCL 5e/6: Server 2003/Server 2003 R2 Vista/Server 2008/Windows 7/Server 2008 R2/Windows 8/Server 2012/Windows 8.1/Server 2012 R2/Windows 10
Direct Print	Supported Media: USB Memory Data Format: TIFF, JPEG

Scan Specifications (Duplex Colour Image Reader Unit)

Scan Type	Duplexing Automatic Document Feeder
Acceptable Originals	Paper Size: A3, A4, A4R, A5, and A5R Paper Weight: Single-sided Original: 38 to 220gsm, Double-sided Original: 50 to 220gsm
Scan Resolution (dpi)	BW: Up to 600 x 600 dpi, Colour: Up to 600 x 600 dpi
Scan Speed (A4)	One Sided: BW: 120 ipm (300 dpi) / 120 ipm (600 dpi) Colour: 120 ipm (300 dpi) / 70 ipm (600 dpi) Double Sided: BW: 240 ipm (300 dpi) / 150 ipm (600 dpi) Colour: 220 ipm (300 dpi) / 90 ipm (600 dpi)
Scan Methods	Push Scan (Send), Pull Scan (TWAIN/WIA), Scan to USB
Paper Capacity (80gsm, A4)	300 sheets

Fax Specifications

Number of Connection Lines	Up to 4
Modem Speed	Super G3: 33.6 Kbps, G3: 14.4Kbps
Fax Resolution	200 x 100 dpi, 200 x 200 dpi, 200 x 400 dpi, 400 x 400 dpi
Fax Memory	Up to 6,000 pages
Speed Dials	Max. 200
Group Dials	Max. 256 dials
Sequential Broadcast	Max. 256
Other Features	Fax Forwarding, Dual Access, PC Fax (TX only)
Compression Method	MH, MR, MMR, JBIG
Sending/Recording Size	Sending: A3, B4, A4, A4R, B5(sent as B4), B5R(Sent as A4), A5(Sent as A4), and A5R(Sent as A4) Recording: A3, B4, A4, A4R, B5, B5R, A5, and A5R

Security Specifications

Standard	Universal Login Manager (ULM), HDD Encryption, Department ID Management, User ID Management, Hard Disk Erase, IPv6, Restricting Features (Restricting New Addresses on Address Book, Address Book Password, Allow Fax Driver TX, Restrict Recall, Confirm Entered Fax Numbers, Restrict Sequential Broadcast, Restrict USB Interface), Memory Lock, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, IEEE802.1x, Encrypted Printing, Secure Watermark
Optional	Document Scan Lock, Removable HDD, uniFLOW Secure Printing

imagePASS-Y3 (Optional)

PDL	PCL 6, Adobe PS 3
Memory	8GB
Hard Disk	500GB
CPU	Intel Pentium G4400 (3.3 GHz)
System	Fiery FS350Pro
PS Fonts	138 Adobe PS fonts
PCL Fonts	113 PCL Fonts
Interface	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear), 3 (front on Fiery QuickTouch™) USB2.0 x 4 (Rear)
Network Protocol	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNTp, 802.1X, DHCP, DNS, NTP)

Paper Deck Unit-E1 (Optional)

Paper Size	A4
Paper Weight	52 to 256 gsm
Paper Capacity	3,500 sheets (80gsm)
Dimensions (W x D x H)	363mm x 630mm x 582mm
Weight	Approx. 37kg

POD Deck Lite-C1 (Optional)

Paper Size	A3, A4, A4R, SRA3, 11"x17"
Paper Weight	52 to 256 gsm
Paper Capacity	3,500 sheets (80gsm)
Weight	Approx. 68kg

External Staple Finisher/Booklet Finisher-V1 (Optional)

Number of Trays	3
Stack Capacity (Non Collate)	Tray A (Upper) Capacity: A4/A5R 250 sheets, A3/A4R 125 sheets Tray B (Middle) Capacity: A4/A5R 250 sheets, A3/A4R 125 sheets Tray C (Lower) Capacity: A4/A5R 3,000 sheets, A3 1,500 sheets
Paper Weight	52 to 256gsm
Staple Position	Corner, Double, Booklet Stitch (Booklet Finisher only)
Stapling Capacity	Staple: 65 sheets, supports multi-position stapling ECO-Staple: Up to 5 sheets Staple on Demand: 65 sheets Saddle Stitch: Up to 20 sheets (Booklet Finisher only) Saddle Folding: 3 sheets (Booklet Finisher only)
Dimensions (W x D x H)	Staple Finisher: 525mm x 623mm x 1,099mm Booklet Finisher: 525mm x 623mm x 1,099mm
Weight	35kg/58kg

Booklet Stitch Specifications (Booklet Finisher Only)

Paper Size	A3, A4R
Saddle Stitch Capacity	20 sheets
Paper Weight	52 to 256gsm

Document Insertion/Folding Unit J1

C-Fold Paper Size	A4
Paper Weight	60 to 105 gsm
Z-Fold Paper Size	A3, A4
Paper Weight	52 to 105 gsm
Output Capacity of C-Fold	40 sheets (80gsm)
Document Insertion Unit Size	A3, A4
Weight	60 to 256gsm
Capacity	100 sheets (80gsm)
Dimensions (W x D x H)	662mm x 679mm x 1,242mm
Weight	76kg

Other Optional Accessories

Paper Deck Unit-E1, POD Deck Lite-C1, Tab Feeding Attachment Kit-B1, Copy Tray-R1, Utility Tray-B1, Staple Finisher-V1, Booklet Finisher-V1, Document Insertion Unit-P1, Document Insertion/Folding Unit-J1, 2/3 Hole Puncher Unit-A1, Upright Control Panel-H1, Reader Heater Unit-G1, Cassette Heater Unit-38, ADF Access Handle-A1, Super G3 Fax Board-AS1, Super G3 2nd Line Fax Board-AS1, Super G3 3rd/4th Line Fax Board-AS1, Remote Fax Kit-A1, IP FAX Expansion Kit-B1, PCL International Font Set-A1, Barcode Printing Kit-D1, imagePASS-Y3, Removable HDD Kit-B1, Gui Access Kit, Fiery Compose, Fiery Impose, Fiery Impose and Compose, Fiery imageViewer, Universal Send Trace & Smooth PDF Kit-A1, Universal Send Security Feature Set-D1, Universal Send Digital User Signature Kit-C1, Voice Guidance Kit-G1, Voice Operation Kit-D1, Document Scan Lock Kit-B1, Web Access Software-K1

¹ Tab paper can be fed from cassette 3 & 4 when the optional TAB FEEDING ATTACHMENT KIT-B1 is installed.
² Some types of tracing paper cannot be used.

For information and services contact

Canon Australia Pty Ltd 1800 444 199 canon.com.au
Canon New Zealand Ltd 0800 222 666 canon.co.nz



No one does it like you

