

Canon



CORPORATE SOLUTIONS



imageRUNNER®
5000V

CORPORATE SOLUTIONS

A REFRESHING SOLUTION FOR HIGH-VOLUME OFFICES

The Canon imageRUNNER 5000V device is a multifunction solution designed to help rejuvenate productivity.

Today's high-volume corporate departments need solutions that allow them to achieve maximum levels of efficiency without exhausting their resources. With the imageRUNNER 5000V device, you can have just that.



 **imageRUNNER®**
5000V

Building on the trusted reliability of Canon imageRUNNER offerings, the imageRUNNER 5000V model delivers fast output speeds of up to 50 pages per minute (letter) with support for copy, print, and scan functions, while at the same time offering superior image quality, network integration, and finishing capabilities. Plus, time-saving features, high-yield supplies and consumables, and a host of energy-saving technologies help to reduce operating costs.

So when you're looking to streamline your information workflow, look no further than the imageRUNNER 5000V device—an economical solution that's sure to refresh your high-volume corporate department.

OPTIMIZE PERFORMANCE AND SIMPLIFY TASKS

Whether copying, storing, printing, or scanning, the imageRUNNER 5000V device is equipped with all the tools necessary to help you perform your best.

EFFICIENT DOCUMENT REPRODUCTION AND STORAGE

The imageRUNNER 5000V device is not only simple to program and maintain, but each document is accurately reproduced. Leverage the system's vast memory to scan and store documents in a Mail Box for later use. A host of image and document manipulation features can be accessed through a user-friendly control panel, making it easy to create documents that look the way you want, every time.

PRODUCTIVE NETWORK PRINTING AND SCANNING

As a powerful networked device, the imageRUNNER 5000V model provides standard network printing and scanning for busy multiuser environments. An embedded print controller enables enhanced 2400 x 600 dpi print resolution for superior image quality and provides support for popular PCL 5e/6 and emulated PostScript® 3™ page description languages. And, through Canon's Network ScanGear utility, you can scan and "pull" hard-copy-based information into existing workflows.

RELIABILITY FROM START TO FINISH

Quickly feed up to 100 one- or two-sided originals through the imageRUNNER 5000V device's standard Automatic Document Feeder (ADF). For uninterrupted productivity, the imageRUNNER 5000V model offers a five-way paper feeding system with a 4,150-sheet capacity.

Add the optional Finisher-F1 to produce professional-looking documents with ease. The finishing option provides multi-position stapling, optional hole-punching, and a 2,000-sheet capacity for long-run job output.

IMAGE OF A LEADER

With the imageRUNNER 5000V device, Canon delivers yet another solution that enables corporate departments to drive high levels of productivity and efficiency.



Finisher-F1



Automatic Document Feeder (ADF)




User-Friendly Control Panel



Generous Paper Supply

SPECIFICATIONS

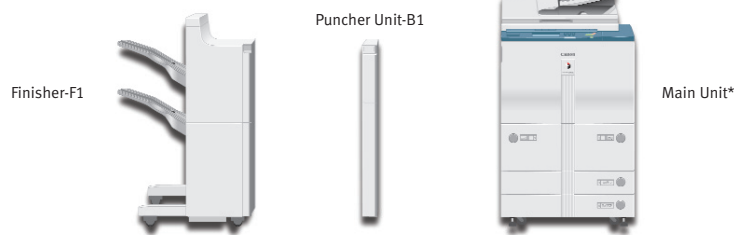

MAIN UNIT

Type:	Monochrome Digital Multifunction Imaging System
Imaging System:	Laser Dry Electrostatic Transfer
Developing System:	Dry Monocomponent Toner Projection
Memory:	Standard 192MB RAM + 5.1GB HDD (Max. Capacity: Approximately 4,000 Originals)
First-Copy Time:	3.8 Seconds or Less from Platen Glass 5.1 Seconds or Less from ADF
Warm-Up Time:	5 Minutes or Less
Acceptable Originals:	Sheets, Books, 3-Dimensional Items (Up to 4.4 lb.)
Max. Original Size:	11" x 17" (Ledger)
Max. Copy Size:	11" x 17" (Ledger)
Min. Copy Size:	4" x 5-7/8"
Max. Mail Boxes Supported:	100
Max. Copy Reservation:	5 Jobs
Scan Resolution:	600 x 600 dpi
Copy Resolution:	1200 x 600 dpi (Interpolated)
Print Resolution:	2400 x 600 dpi (Interpolated)
Halftone:	256 gradations of gray
Copy/Print Speed:	50 cpm (Letter, Statement-R) 39 cpm (Letter-R) 36 cpm (Legal) 30 cpm (11" x 17")
Duplexing:	Standard Automatic Trayless Duplexing
Magnification Reduction/Enlargement:	25% to 400% in 1% Increments
Multiple Copies:	1 to 999
Standard Paper Supply:	Dual Front-Loading Trays (1,500 Sheets Each) Dual Front-Loading Cassettes (550 Sheets Each) 50-Sheet Stack Bypass (Total: 4,150)
Paper Weights:	17 lb. to 24 lb. Bond (550-Sheet Cassettes) 17 lb. Bond to 110 lb. Index (Stack Bypass, 1,500-Sheet Drawers)

Dimensions (H x W x D):	44-3/4" x 25-3/8" x 29-1/4" (1136mm x 643mm x 743mm)
Weight:	Approximately 462 lb. (210kg)
Power Requirements:	120V AC, 60Hz, 15A
Power Consumption:	1.5kW (Max.)
Drum:	Amorphous Silicon - Estimated Yield: 3,000,000 Impressions
Toner:	Magnetic Negative Toner - Estimated Yield: 33,000 Images (at 6% Coverage)
Network Printing Specifications	
Processor:	Canon Custom Processor
RAM:	192MB(Std./Max.)—Shared
Hard Disk:	5.1GB—Shared
PDL Support:	PCL 5e, PCL 6, PostScript 3 Emulation
Internal Fonts:	136 PostScript Fonts 80 PCL Roman Fonts 32 PCL Bar-code Fonts
Interface Connections:	10/100Base-TX (RJ-45) IEEE 1284
Protocol Stacks	
IPX/SPX:	Ethernet II, Ethernet 802.2, Ethernet 802.3, Ethernet SNAP
TCP/IP:	Ethernet II
AppleTalk® Phase II:	Ethernet SNAP
Network OS:	Novell® NetWare® v.3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX) Windows® 98/Me (TCP/IP) Windows NT® 4.0 (TCP/IP) Windows 2000, XP, Server 2003 (TCP/IP) Solaris™ 1.1x, 2.5x or Later (TCP/IP) Apple® Macintosh® 7.5 or Higher (PPD)
ACCESSORIES	
Automatic Document Feeder (Standard)	
Acceptable Originals:	Statement to 11" x 17"
Capacity:	100 Sheets (Letter/20 lb.)
Acceptable Paper Weight:	13 lb. to 32 lb. Bond
Original Replacement Speed:	Up to 50 Sheets/Minute (Letter)

Finisher-F1 (REM) (Optional)**

Number of Trays:	2 Trays
Tray Capacity	
Top Tray:	1,000 Sheets (Letter, Statement-R) 500 Sheets (Letter-R, Legal, 11" x 17") Offset Stacking: Max. 30 Sets (All Sizes)
Lower Tray:	1,000 Sheets (Letter, Statement-R) 500 Sheets (Letter-R, Legal, 11" x 17") Offset Stacking: Max. 30 Sets (All Sizes)
Staple Position:	1-Any Corner 2-Side Margin
Max. Stapling Capacity:	50 Sheets (Letter, Statement) 30 Sheets (Letter-R, Legal, 11" x 17")
Power Source:	Directly from Main Unit
Dimensions (H x W x D):	41-3/8" x 26-3/8" x 24-1/4" (1052mm x 669mm x 614mm)
Weight:	Approximately 70.5 lb. (32kg)

Puncher Unit-B1 (REM) (Option for Finisher-F1)**

Max. Paper Weight:	17 lb. Bond to 110 lb. Index
Punch Types:	2-Hole, 3-Hole (Auto Change) 3-Hole (Letter, 11" x 17") 2-Hole (Legal, Letter-R)
Punch Dust Stock:	Approximately 3,000 Sheets
Power Source:	Directly from Main Unit
Dimensions (H x W x D):	34-7/8" x 3" x 24-1/4" (886mm x 75.5mm x 614.4mm)
Weight:	11.9 lb. (5.4kg)

* imageRUNNER Factory-produced New Model:

This imageRUNNER Factory-produced New Model has been disassembled to a predetermined standard by the original equipment manufacturer, and manufactured with a new serial number. This model contains new, reconditioned and/or recovered parts and fully meets the manufacturer's new product performance and reliability specifications. (This product contains reconditioned parts and materials.)

** Remanufactured Item

Canon
*image*ANYWARE

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. PostScript is a registered trademark of Adobe Systems Incorporated in the United States and/or other countries. Apple is a trademark of Apple Computer, Inc. Novell and NetWare are registered trademarks and IPX/SPX is a trademark of Novell, Inc. in the United States and other countries. Solaris is a trademark or registered trademark of Sun Microsystems, Inc. in the United States and other countries. CANON and IMAGERUNNER are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners.
Specifications subject to change without notice. Product shown with optional accessories and equipment.
©2006 Canon U.S.A., Inc. All rights reserved.

0065W511
0906-5000V-20M-DSP

PRINTED ON RECYCLED
PAPER IN THE U.S.A.

