




KONICA MINOLTA

bizhub 200 PRINTER_COPIER_SCANNER_FAX_

A BIZHUB THAT'S JUST RIGHT FOR YOUR BUSINESS. For small and mid-sized offices, the challenge is simple: getting all the document power you need, at a cost you can afford. The bizhub™ 200 is designed to do just that – with 20 ppm output, built-in print control, and fast, flexible scanning that can move information faster to more destinations. You'll also have modular auto finishing options for in-house, on-demand productivity – plus high-volume fax option for all-in-one functionality to eliminate redundant or underutilized equipment. New security enhancements deliver best-in-class protection to safeguard essential data and guard against unauthorized access. And a complete suite of PageScope™ software helps you manage devices and documents – so your business keeps growing.

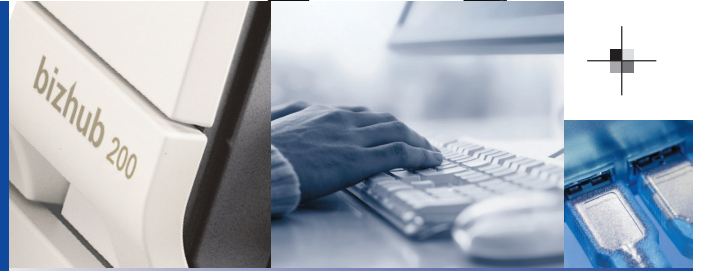

business_by design

CONNECT COMMUNICATE CONTROL

- ▶ 20 PPM OUTPUT FOR HIGH-VOLUME PRODUCTIVITY
- ▶ 60,000 PAGE-PER-MONTH MAXIMUM DUTY CYCLE
- ▶ EMPERON™ PRINT SYSTEM, BUILT-IN PRINT CONTROL
- ▶ FLEXIBLE SCANNING TO EMAIL, FTP, SMB (DESKTOP)
- ▶ SCAN-TO-HDD ON OPTIONAL 40 GB HARD DISK DRIVE
- ▶ ADVANCED SECURITY FOR HDD, PRINTING, ACCESS
- ▶ ISO 15408 CERTIFICATION
- ▶ MODULAR FINISHING OPTIONS, BOOKLET-MAKING
- ▶ 4,000-SHEET MAXIMUM PAPER CAPACITY WITH OPTIONS
- ▶ SUPER G3 FAX OPTION, OPTIONAL DUAL-LINE SUPPORT
- ▶ PAGESCOPE SOFTWARE FOR NETWORK MANAGEMENT

The essentials of imaging

bizhub 200



PRINTER_COPIER_SCANNER_FAX_

CONNECT_COMMUNICATE_CONTROL_

General Specifications

TYPE:	Digital Printer/Copier/Scanner/Fax
IMAGING SYSTEM:	Simitri® Polymerized Toner
SCANNING SYSTEM:	CCD Line Sensor
PRINT/COPY SPEED:	20 ppm (letter) 8-1/2" x 11" portrait, 17 ppm (letter) 8-1/2" x 11" landscape, 14 ppm (legal) 8-1/2" x 14", 12 ppm (ledger) 11" x 17"
MONTHLY DUTY CYCLE:	60,000 pages
PRINT/COPY RESOLUTION:	True 600 x 600 dpi
HALFTONE REPRODUCTION:	256 gradations
MEMORY:	192 MB (32 MB for files, 170 pages) (standard), 40 GB (maximum) (optional)
WARM-UP TIME:	14 seconds (from Sub Power On), 24 seconds (from Main Power On)
FIRST COPY:	5.3 seconds or less
COPY QUANTITY:	1 - 999 copies (countdown, interrupt capability)
MAGNIFICATION:	Zoom range: 25 - 400%, 0.1% increments, Preset reduction: 93%, 79%, 73%, 65%, 50%, Preset enlargement: 121%, 129%, 155%, 200%
EXPOSURE MODES:	Auto, Text, Photo, Text/Photo, Manual
ORIGINAL SIZE:	Up to 11" x 17" maximum
PAPER SIZE:	5-1/2" x 8-1/2" to 11" x 17"
PAPER WEIGHT:	15 lb. to 24 lb. bond, Manual bypass: 24-1/4 lb. to 55-3/4 lb. bond; specialty paper (thick paper, OHP transparencies, postcards, envelopes, label sheets)
STANDARD PAPER SUPPLY:	550-sheet Universal Paper Drawers (2), 150-sheet Intelligent Bypass
OPTIONAL PAPER SUPPLY:	550-sheet Universal Paper Cabinet (1 paper drawer plus storage drawer), 1,100-sheet Universal Paper Cabinet (two 550-sheet drawers), 2,750-sheet Large Capacity Cabinet
MAXIMUM PAPER CAPACITY:	4,000 sheets (total, with options)
DOCUMENT FEEDER:	DF-605 Reversing Auto Document Feeder (optional), Capacity: 80 sheets, Speed: up to 70 scans per minute, Original size: up to 11" x 17", 1-sided, 2-sided originals, Mixed Original Detection
POWER REQUIREMENTS:	120 V, 60 Hz, 11.5 A
POWER CONSUMPTION:	1380 W (max.)
DIMENSIONS (W x D x H):	26-3/4" x 28" x 28-1/4"
WEIGHT:	163 lbs.
OPTIONS:	DF-605 Reversing Auto Document Feeder, DK-501 Copy Desk, EK-502 Local Interface Kit (IEEE Parallel), EM-303 32 MB Expanded Memory, EM-304 64 MB Expanded Memory, EM-305 128 MB Expanded Memory, FK-503 Fax Kit, FS-508 Base Finisher, HD-504 40 GB Hard Disk Drive, JS-502 Job Separator Tray, ML-502 Fax Dual Line (requires FK-503), MT-501 Mailbin Kit, OC-502 Original Cover, OT-601 Output Tray, PC-102 Universal Paper Feed Cabinet (550 sheets, letter to ledger size, plus storage drawer), PC-202 Universal Two-Way Paper Feed Cabinet (1,100 sheets, letter to ledger size), PC-402 Large Capacity Cabinet (2,750 sheets, letter portrait), PU-501 Punch Unit, SC-504 HDD Encryption Kit, SD-502 Saddle Stitcher, SP-501 Stamp Unit (requires FK-503), Spare TX Marker Stamp 2 (requires FK-503)
PAGESCOPE APPLICATIONS:	Network & Device Management: PageScope HDD Backup Utility, PageScope Web Connection, PageScope Net Care, PageScope Network Setup, PageScope EMS Plug-Ins, PageScope NDPS Gateway, PageScope Data Administrator, PageScope Driver Packaging Utility, User Tools: PageScope Box Operator, PageScope Print Status Notifier, PageScope Web Print Assistant, Optional Software: PageScope Workware
AVAILABLE PRINT/COPY FUNCTIONS:	Account Track (up to 1,000 accounts), APS/AMS, Auto Duplex, Stackless, Auto/Manual/Photo Exposure, Auto Tray Switching, Black-White Reverse, Book Copy, Book Erase, Booklet Function, Box Function (Copier, Reprint with setting mode change, Resend), Combined Copy Setting (2-in-1, 4-in-1), Copy Job Reserve (queue) (5 jobs), Copy Programs (Mode Memory) (10 jobs), Cover Mode, Criss/Cross Sorting, Distribution Number and Stamping, Energy Save Mode, Erase (Edge/Frame), File Margin, Hole-Punching (2/3 hole), Horizontal/Vertical Zoom Ratios (X/Y magnification), Image Overlay, Image Repeat, Image Rotation, Interrupt Mode, Mixed Original Detection, OHP Interleave, Page Insertion, Proof Copy, Separate Scanning, Sleep Mode Recovery, Stapling (single, multi-position, center), Text, Photo, Text/Photo, Dot Matrix Modes, Zoom

Emperon Print System (standard):

TYPE:	Embedded
PROCESSOR:	300 MHz
MEMORY:	192 MB (standard)
NETWORK INTERFACE:	RJ45 (Ethernet 10-BaseT/100-BaseTX) + USB 1.1/2.0 Port (standard), Parallel (IEEE 1284 compatibility) (optional)
NETWORK PROTOCOLS:	TCP/IP, IPX/SPX, SMB, LPD, IPP1.1, AppleTalk (EtherTalk), LPR, Netware (4.x, 5, 6), NDPS, SMTP, POP3, LDAP, SSL, SNMP, HTTP 3.0
SCANNING FUNCTIONS:	Scan-to-Email, Scan-to-FTP, Scan-to-HDD (with optional HDD), Scan-to-SMB (Scan-to-Desktop), Scan-to-URL, Network HDD TWAIN
PRINT DRIVERS:	PCL6 emulation: Windows 98 SE or Windows ME, Windows 2000 (SP4 or later), Windows XP (SP2 or later), Windows Server 2003, Windows NT 4.0 (SP6a), Windows Vista 32-bit, 64-bit PostScript 3 emulation: Windows 98 SE or Windows ME (PPD file), Windows 2000, Windows XP (SP2 or later), Windows Server 2003, Windows NT 4.0 (SP6a), Windows Vista 32-bit, 64-bit Mac OS 9.2 (PPD file), Mac OS X 10.2 or 10.3

FK-503 Fax Option Specifications

COMMUNICATION LINE:	Public Switched Telephone Network (PSTN)
COMPATIBILITY:	G3, Super G3
DATA COMPRESSION:	MH, MR, MMR, JBIG
MODEM SPEED:	33.6 kbps (max; auto fallback)
TRANSMISSION SPEED:	Less than 3 seconds per page
SCANNING SPEED:	Up to 70 sheets per minute (with DF-605 Reversing Auto Document Feeder option)
FAX RESOLUTION:	200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, Text Photo (200 x 200 dpi), Grayscale (200 x 200 dpi), Super Grayscale (400 x 400 dpi),
MEMORY:	32 MB
FAX TRANSMISSION/RECEPTION SIZE:	Up to 11" x 17"
DIALING:	540 one-touch dialing locations
BROADCAST:	300 destinations
OTHER FACSIMILE FUNCTIONS:	IP Address Faxing, IP Relay Fax, PC Faxing



KONICA MINOLTA

KONICA MINOLTA
BUSINESS SOLUTIONS U.S.A., INC.

100 Williams Drive
Ramsey, NJ 07446

www.kmbs.konicaminolta.us
www.kmbs.konicaminolta.us/solutions

bizhub



© 2007 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Konica Minolta and The essentials of imaging are trademarks of KONICA MINOLTA HOLDINGS, INC. bizhub, Emperon, and PageScope are trademarks of KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. Simitri is a registered trademark of KONICA MINOLTA BUSINESS SOLUTIONS. All other brands and product names are registered trademarks or trademarks of their respective owners.

Design and specifications are subject to change without notice. Some functions may require options, which may or may not be available at time of launch.
Office imagery courtesy of Knoll, Inc.

Item #: 200SS
12/07