



LEXMARKTM OptraTM T614

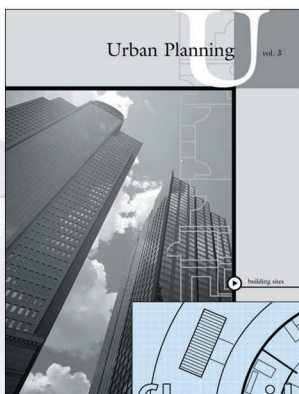

productive



The fast and reliable workgroup laser printer designed to optimize productivity across a wide range of printing applications

- **Immediate Results**
 - 25 pages per minute
 - 9 seconds to first page
 - Powerful 200 MHz processor
- **Lower Operating Cost**
 - 25,000-page cartridge available
 - Adjustable toner darkness settings
 - Print & Hold features
- **Expandable Output**
 - Add two 5-bin mailboxes; or
 - One 1,850-sheet output stacker
- **Optional Multifunction Device**
 - Add an OptraImage for copy, fax and scan capabilities

Lexmark Optra T614

Part Numbers

United States

- Optra T614: 20T3200
- Optra T614nl: 20T3240
- Optra T614n: 20T3280
- Optra T614n (Solaris Ready™): 20T3320

Canada

- Optra T614: 20T3201
- Optra T614nl: 20T3241
- Optra T614n: 20T3281
- Optra T614n (Solaris Ready): 20T3320

Technology

- Laser

Speed

- Up to 25 pages per minute
- 9 seconds to first page

Print Quality

- 1200 x 1200 dpi
- 1200 Image Quality
- 600 x 600 dpi with PQET
- 300 x 300 dpi with PQET

Processor

- 200 MHz QED Rm 5231

Memory (std/max)

- 8MB/384MB (Optra T614)
- 16MB/384MB (Optra T614nl, Optra T614n)
- Expandable SDRAM memory options
 - 4MB SDRAM (p/n 5K00013)
 - 8MB SDRAM (p/n 5K00014)
 - 16MB SDRAM (p/n 5K00015)
 - 32MB SDRAM (p/n 5K00016)
 - 64MB SDRAM (p/n 5K00017)
 - 128MB SDRAM (p/n 5K00119)
- Hard drive with adapter (p/n 43H5494)
- Flash memory
 - 2MB flash DIMMs (p/n 5K00115)
 - 4MB flash DIMMs (p/n 5K00116)
 - 8MB flash DIMMs (p/n 5K00117)
 - 16MB flash DIMMs (p/n 5K00118)

Connectivity

- Standard bidirectional parallel port
- Two Internal Solutions Ports
- On-board 10/100BaseTX Ethernet standard on Optra T614nl, Optra T614n
- Optional RS-232 serial, RS-422 serial, USB, additional parallel, infrared

- Optional LocalTalk®, Coax/Twinax, 10BaseT/2 Ethernet, 10/100BaseTX Ethernet, Token-Ring

Multifunction Attachments

- OptraImage 322 (p/n 14B5025)
- OptraImage 524 (p/n 14B5029)

Compatibility

- PostScript™ 3 emulation standard
- Hewlett-Packard PCL® 6 emulation standard
- PPDS Migration Tool

Font Selection

- PostScript emulation
 - 156 scalable fonts
- PCL 6 emulation
 - 84 scalable fonts
 - 2 bitmapped fonts
- PPDS Migration Tool
 - 39 scalable fonts
 - 5 bitmapped fonts

Paper Handling

- Input (std/max):
 - 600/4100 pages (Optra T614, Optra T614nl)
 - 1100/4100 pages (Optra T614n)
 - Maximum input sources: 7
- Output (std/max): 500/3000 pages
 - Maximum output sources: 11
- Media sizes: 2.75" x 5" to 8.5" x 14" including letter, legal, A4, A5, JIS B5 and executive (may require UAT)
 - Optional envelope feeder: DL, C5, B5, 7 3/4, 9, 10
- Media types: plain paper, envelopes, card stock, transparencies, paper labels, vinyl labels, polyester labels, dual web labels
- Media weights: 16-125 lb.

Options

- 250-sheet drawer (p/n 11K0681)
- 500-sheet drawer (p/n 11K0688)
- 250-sheet tray (p/n 11K1059)
- 500-sheet tray (p/n 11K1060)
- 2,000-sheet drawer (letter) (p/n 11K0718)
- 250-sheet Universally Adjustable Tray and drawer (p/n 11K1878)
- 250-sheet Universally Adjustable Tray (p/n 11K1574)
- 400-sheet Universally Adjustable Tray and drawer (p/n 11K1942)

- 400-sheet Universally Adjustable Tray (p/n 11K1941)
- 500-sheet duplex unit (p/n 11K0722)
- 85-envelope feeder (p/n 11K0720)
- 650-sheet output expander (p/n 11K0723)
- 5-bin mailbox (p/n 11K0724)
 - 100 sheets per bin
- 1,850-sheet high-capacity output stacker (p/n 11K1440)

Supplies

The Optra T614 and Optra T614nl ship with

- 10,000-page* Prebate™ print cartridge (p/n 12A5840)

The Optra T614n ships with

- 25,000-page* Prebate print cartridge (p/n 12A5845)

Other supplies

- 25,000-page* Prebate print cartridge for label applications (p/n 12A5849)
- 25,000-page* print cartridge (p/n 12A5745)
- 10,000-page* print cartridge (p/n 12A5740)

Operating Systems

- Microsoft Windows 2000, 3.1x, 95, 98, NT 3.51, NT 4.0 or higher; Windows for Workgroups 3.1x; MS-DOS; IBM DOS 5.0 or higher; AS/400, UNIX; Mac OS® 7.5 or later
- For a complete, detailed list, please see www.lexmark.com

Size/Weight

- Optra T614, Optra T614nl:
 - 15.9" H x 16.5" W x 20.2" D (404.3 mm x 418.1 mm x 513 mm)
 - 45 lb. (20.4 kg)
- Optra T614n:
 - 21.2" H x 16.5" W x 20.2" D (538 mm x 418.1 mm x 513 mm)
 - 52 lb. (23.6 kg)

Acoustics

- 50 dBA printing
- 30 dBA idle

Duty Cycle

- Up to 130,000 pages per month

Warranty

- One-year LexExpress™ (Optra T614, Optra T614nl)
- One-year or LexOnSite™ or LexExpress (Optra T614n)
- For more warranty information, please visit warranties and returns at www.lexmark.com.

*Based on approximately 5% print coverage at comparable industry settings (print darkness=5)



For a complete list of application support, management and connectivity products for the Optra T614, Optra T614nl and Optra T614n, visit our Web site at www.lexmark.com

©2000 Lexmark International, Inc.
Printed in the United States of America 5/00
All Rights Reserved

71K-6100



Printed on recycled paper.



Lexmark International, Inc. is a global developer, manufacturer and supplier of printing solutions and products, including laser, inkjet and dot matrix printers and associated consumable supplies for the office and home markets. The company is a wholly owned subsidiary of Lexmark International Group, Inc. (NYSE: LXX). Lexmark is on the internet at www.lexmark.com. Specifications subject to change without notice. Lexmark, Lexmark with diamond design, Optra and Prebate are trademarks of Lexmark International Inc., registered in the United States and/or other countries. LexExpress and LexOnSite are service marks of Lexmark International, Inc. Apple, Macintosh and LocalTalk are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. PCL is a registered trademark of Hewlett-Packard Company. Sun, Sun Microsystems, Solaris and the Solaris Logo are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries, and are used under license. All other trademarks are the properties of their respective owners. As an ENERGY STAR Partner, Lexmark International, Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR is a U.S. registered trademark.